


# GATEWAY CONSTRUCTION DETAIL (TYPE A)

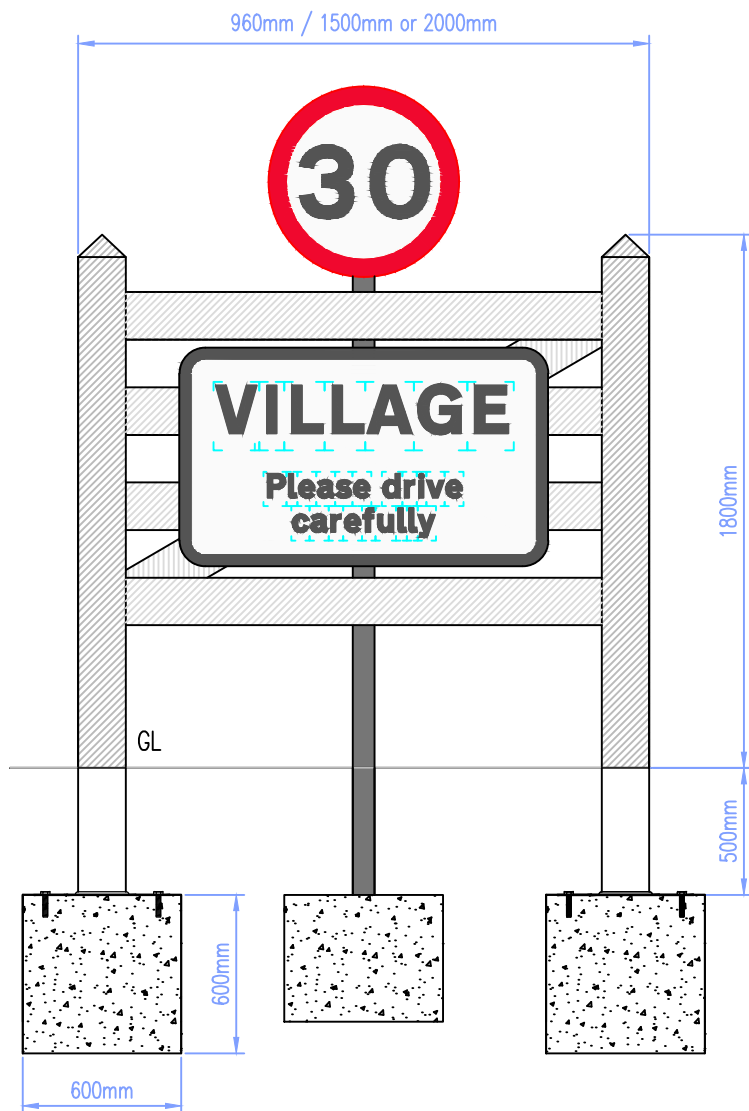

## GENERAL NOTES:

1. Gateway to be installed with a minimum clearance of 500mm from road / verge edge
2. Terminal plate to be installed behind the gateway on a 76mm post within the standard foundation type
3. Two separate foundations are to be installed to SCD 1200-1 Type 1 600mm x 600mm

## COMPOSITE GATEWAY NOTES:

Height – 2300mm (1800mm above ground level to top of post (max))  
 Recommended depth below ground: 500mm  
 Gateway can be cut down to desired height


Signage – Existing or new signs can be used, format of sign as shown:  
 VILLAGE NAME  
 Please drive  
 carefully

Fixing – Below ground extended base.

Models to be installed 500mm below ground level into concrete foundations (refer to installation instructions). Concrete foundations to be topped off with turf or to match existing construction, refer to manufacturers instructions

Number of slats – Available 3 or 4 slats, crossbar to be included

Colour – White

 Lucy Robinson. Director of Economy, Skills & Environment Endeavour House, 8 Russell Road, Ipswich, Suffolk. IP1 2BX.	REVISION(S)			ORIGINATOR	CHECKER	PROJECT TITLE			
				ORIG	DESIGN	PROJECT LINE 1			
				DESIGNER	REVIEWER	PROJECT LINE 2			
				CHECK	REVIEW	PROJECT LINE 3			
			SCALE(S)	ORIGINAL SIZE A4	DATE	DRAWING TITLE			
DESCRIPTION			REV.	DATE	INTL.	SCALE	DATE	DRAWING NUMBER	REVISION
							DRG NO	REC	

DRAFT COPY